

Electronic Cruise Control for BMW R1200GS Integral ABS 1 & 2



NOTE: - This cruise control may also be fitted to bikes NOT equipped with ABS brakes.

NOTE: - This cruise control will NOT fit any bikes fitted with an Evaporative Emissions Carbon Canister. The carbon canister is mounted on the left side of the bike, beside the rear spring/damper (shock absorber). The canister must be either moved or removed in order to fit the cruise control, or the cruise control actuator must be mounted in a different location.

The following provides a brief description of the power consumption and component locations of the MotorCycle Setup electronic cruise control.

Installed weight of the cruise control is approximately 2.5kg.

Current draw while the cruise is switched on, but not engaged, is approximately 0.250 amp (3 watts). Current draw while the cruise is engaged is nominally 0.50~0.80 amp (6~10 Watts).

By comparison, a head light bulb typically draws about 4 amps (55 Watts), and a tail light bulb (running light) draws about 0.4 amp (5 Watts).

Refer to the line drawing on the back of this sheet to identify the components from the numbers in the text.

The **Computer (1)** mounts behind the steering head, between the back of the steering head and the fuel tank.



The **Actuator (2)** is clamped to the frame on the left side, next to the bike's rear suspension spring/damper (shock absorber). Satin Black (shown) or Silver Pearl (optional) powder coated aluminium covers are supplied to prevent dirt and water ingress into the actuator and to improve the appearance of the actuator. A **vacuum hose assembly (3)** is provided to connect the actuator to the engine.



The bike's original throttle cable splitter box (throttle cable divider) is removed from the bike and our **Cable Interface Unit (4)** is fitted to the bike. No modifications to the bike's cables are required at all, it is a straight swap. A suitable mounting bracket is supplied to allow fitment of the CIU in the original cable splitter mount. See the previous page for a photo with the fuel tank removed.



The **Speed sensor (5)** is mounted below the right hand front brake caliper. The original caliper mounting bolt is removed and a new bolt and spacer washers fitted to allow the speed sensor to be mounted. Nickel-plated magnets are placed in the heads of the bolts that mount the brake disc.



The **Control Switch (6)** is mounted on the left hand (clutch) lever mirror mount. The switch is located just above the left switch block.



To ensure that the cruise control installation is as safe as possible, an additional **hydraulic pressure switch (7)** is fitted to the bike's front brake circuit. This is to provide a back up method of disengaging the cruise control in the event of failure of the bike's brake light circuit. Fitment of this switch involves replacing one of the brake line 'banjo' bolts with a new bolt that has a pressure switch built in to it. Depending on what ABS version the bike is fitted with, the switch may be fitted either at the handle end of the front brake lever hose (as shown), or at the other end of the front brake lever hose.



MotorCycle Setup P/L

ABN 94 798 167 654

6 Kinston Street
Mount Waverley VIC 3149
AUSTRALIA

Web Site: <http://www.mccruise.com>

International: Phone (International Access Code) 61 3 9808 2804


Fax (International Access Code) 61 3 9808 2445

Australia: Phone (03) 9808 2804

Fax (03) 9808 2445

E-mail: mcsetup@bigpond.net.au

The **Wiring Loom (8)** has the same type of plugs or terminals that are already used on the motorcycle, with two exceptions. Power for the cruise control is taken from the positive wire to the bike's accessory power plug. Tach (engine speed) sensing is detected from the bike's ignition primary circuit. These connections must be spliced. Splice terminals and heat shrink tube are supplied in the kit to make this connection. Brake sensing taken from a connection at the rear brake light. Matching connectors on the cruise control loom are plugged in to the light and the bike's loom. This is used to disengage the cruise if the clutch is operated. The cruise control is grounded on the negative battery terminal. The wiring loom is a 'custom' finished item, with all parts of the loom cut length and terminated appropriately.

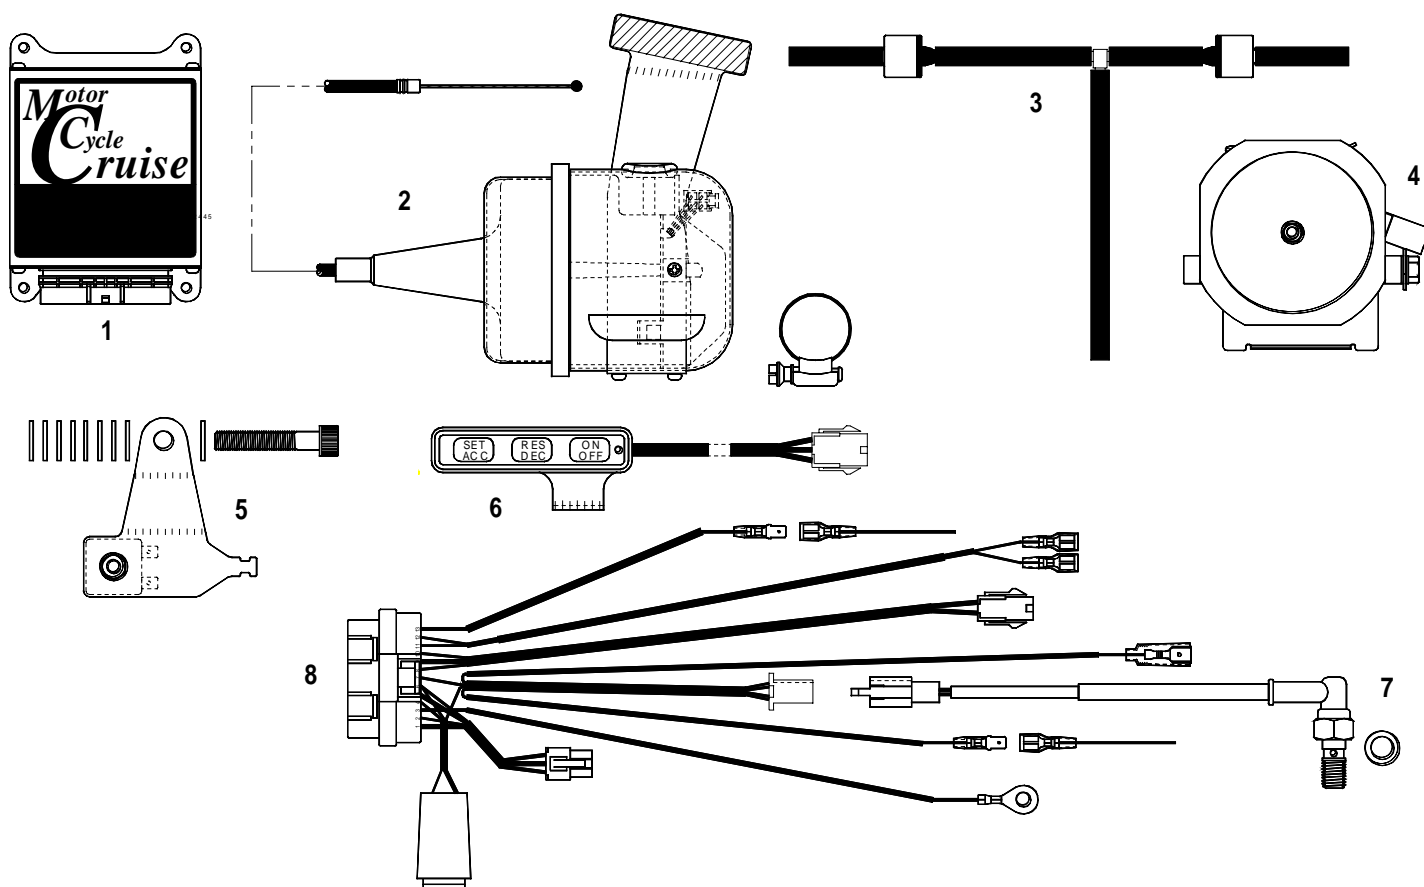

MotorCycle Setup P/L

ABN 94 798 167 654

6 Kinston Street
Mount Waverley VIC 3149
AUSTRALIA

Web Site:

<http://www.mccruise.com>

International:

Phone (International Access Code) 61 3 9808 2804

Fax (International Access Code) 61 3 9808 2445

Australia:

Phone (03) 9808 2804

Fax (03) 9808 2445

E-mail: mcsetup@bigpond.net.au